

NT 75/2 AP ME TC

Powerful, twin-motor wet & dry vacuum with tilting stainless steel waste container. Featuring the Ap semi-automatic filter clean system for constantly high suction power.



Order no. 1.667-292.0

- Semi-automatic filter cleaning
- Tilting chassis
- Flat pleated filter (dust class M)

Technical data		
EAN code		4039784727298
Current type	Ph / V / Hz	1 / 220 - 240 / 50 - 60
Air flow	l/s	2 × 74
Vacuum	mbar / kPa	254 / 25.4
Container content	l	75
Container material		Stainless steel
Rated input power	W	max. 2760
Standard nominal width		ID 40
Cable length	m	10
Sound pressure level	dB(A)	73
Colour		silver
Weight without accessories	kg	26
Dimensions (L × W × H)	mm	700 × 505 × 995

Equipment		
Suction hose length	m	4
Bend		Plastic
Quantity of suction tubes	Piece(s)	2
Suction tubes length	mm	550
Suction tubes material		Stainless steel
Quantity of filter bags	Piece(s)	1
Filter bag material		Paper
Wet/dry floor nozzle width	mm	360
Crevice nozzle		■
Drain hose (oil-resistant)		■
Automatic cut-out features at max. filling quality		■
Flat pleated filter		Paper
Tilting chassis		■
Filter cleaning		Semi-automatic filter cleaning Ap
Sturdy bumper		■
Push handle		■
Protection class		II
Stop swivel castor		■

■ Included in delivery.




On-board practical storage

- Large on-board storage area for tool and accessory storage.



Integrated drain hose

- Easily accessible drain hose for convenient liquid disposal.

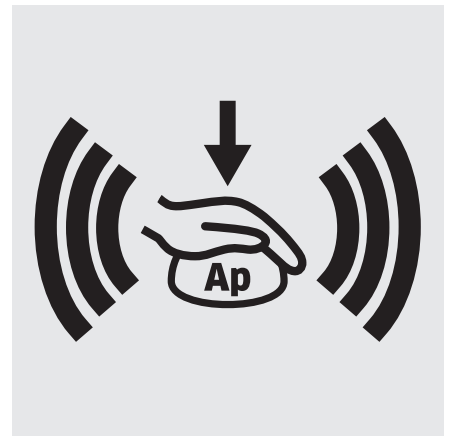

Semi-automatic filter cleaning

- Semi-automatic filter cleaning effectively ensures constantly high suction power.

EQUIPMENT FOR NT 75/2 AP ME TC

1.667-292.0



		Order no.	Description	
FLAT PLEATED FILTER, STANDARD, BIA C OR UP TO DUST CLASS M				
Flat pleated filter (paper)				
Flat pleated filter	1	6.904-283.0	Paper flat pleated filter (BIA-(U,S,G,C) dust class M) suitable for NT 65/2 Eco, NT 65/2 Eco Tc, NT 65/2 Eco Me.	■
Flat pleated filter (PES)				
Flat filters (PES)	2	6.904-284.0	Flat filter (PES) - BIA-(U,S,G,C) dust class M: rotproof polyester fleece, ideal for wet use and abrasives. Standard for NT 72/2 Eco Tc.	□
Flachfaltenfilter (PTFE)				
Flat pleated filter, PTFE	3	6.907-449.0	Polyester fleece with PTFE coating, dust class M, for Tact² vacuum cleaners. Particularly suitable for very adhesive materials.	□
BENDS				
Plastic bend				
Elbow packaged NW40 1K	4	2.889-171.0	Bend for the new clip system in nominal size DN 40.	■
Elbow electrically conducting packaged N	5	2.889-148.0	Ergonomic bend for the new clip system. With airflow control slide, in an antistatic design.	□
Plastic bend	6	5.031-718.0	Plastic bend (DN 35) with C-35 clip system. For all industrial single-motor NT 361 to NT 611 Eco models (except NT Eco M and NT Eco H).	□
	7	5.031-939.0	Electrically conductive plastic bend (DN 35) with C-35 clip system. For all industrial single-motor NT 361 to NT 611 Eco models.	□
	8	5.032-427.0	Electrically conductive plastic bend (DN 40) with C-40 clip system, suitable for all NT vacuum cleaners.	□
Bend metal				
Bend, DN 35, metal	9	6.900-519.0	Robust, chromium-plated metal bend (DN 35), can be used instead of a plastic bend (with clip system adapter 5.407-112.0, C 35-DN 35, plastic, el.).	□
Bend, stainless steel ID 35	10	6.903-141.0	Stainless steel and crooked, ID 35	□
Bend, DN 40, metal	11	6.900-276.0	Robust, chromium-plated metal bend (DN 40), can be used instead of a plastic bend (with clip system adapter 5.407-111.0, C 40-DN 40, plastic, el.).	□
Bend, stainless steel ID 40	12	6.902-079.0	Stainless steel and crooked, ID 40	□
SUCTION NOZZLES				
All-purpose nozzles (wet/dry)				
Floor tool packaged NW40 360mm	13	2.889-153.0		■
Floor tool DN40-370	14	6.903-018.0	All-purpose aluminium nozzle with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners.	□

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR NT 75/2 AP ME TC

1.667-292.0



		Order no.	Description	
SUCTION NOZZLES				
All-purpose nozzles (wet/dry)				
Floor tool neutrally DN40	15	6.906-383.0	All-purpose aluminium nozzle (DN 40) with 450 mm working width. With height-adjustable side rollers, brush strips (6.903-065.0) and oil-resistant squeegees (6.906-146.0). Only for NT vacuum cleaners.	<input type="checkbox"/>
Floor tool neutrally DN35	16	6.906-384.0	All-purpose aluminium nozzle (DN 35) with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners.	<input type="checkbox"/>
Wet and dry floor nozzle	17	2.889-117.0	The wet and dry floor nozzle (DN 40) allows quick changing of the squeegees/brush and is ideal for wet vacuum cleaning of large areas.	<input type="checkbox"/>
Crevice nozzles				
Crevice nozzle DN 40 300mm 1:50	18	5.130-655.0		■
Crevice nozzle packaged NW35	19	2.889-130.0	Plastic crevice nozzle.	<input type="checkbox"/>
Crevice nozzle	20	6.900-922.0	Plastic crevice tool (DN 35) for vacuuming in crevices and corners. Length: 370 mm.	<input type="checkbox"/>
Crevice nozzle DN40	21	6.905-817.0	Metal crevice tool (DN 40) for vacuuming in crevices and corners. Length: 400 mm.	<input type="checkbox"/>
All-purpose brushes				
All-purpose brush	22	6.903-863.0	Natural bristles (ox hair), bristle element 120 × 45 mm.	<input type="checkbox"/>
Car cleaning nozzles				
Car nozzle, ID 40, 90 mm	23	6.900-952.0	Angled, flat, plastic car vacuuming tool with about 90 mm working width. Only for NT vacuum cleaners.	<input type="checkbox"/>
	24	2.840-095.0		<input type="checkbox"/>
Rubber suction tools, nose 45°				
Rubber suction tools, nose 45°	25	6.902-104.0	45° rubber suction nozzle (DN 35), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.	<input type="checkbox"/>
	26	6.902-105.0	45° rubber suction nozzle (DN 40), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.	<input type="checkbox"/>
Pipe dusting nozzles				
BRUSH	27	6.903-035.0	Plastic, pipe diameter 100 mm	<input type="checkbox"/>
	28	6.903-036.0	Plastic, pipe diameter 200 mm	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR NT 75/2 AP ME TC

1.667-292.0



		Order no.	Description	
SUCTION TUBES				
Suction tubes stainless steel				
Set suction tube stainless steel NW40 55	29	2.889-194.0	Stainless steel suction tube set (2 × 0.55 m)	■
Suction tube, DN 35	30	6.902-154.0	0.5 m long stainless steel suction tube (ID 35) for wet and dry vacuum cleaners. Ideal for frequent wet vacuuming applications and for vacuuming corrosive components.	□
Suction tube, ID 40	31	6.902-081.0	Stainless steel suction tube (DN 40, 0.5 m) only suitable for NT vacuum cleaners.	□
Suction tube	32	6.906-531.0	Stainless steel suction tube (DN 40, 1.0 m) only suitable for NT vacuum cleaners.	□
Suction tubes metal				
Suction tube DN35	33	6.900-514.0	Chromium-plated metal suction tube (DN 35, 1x0.5 m), standard for virtually all single-motor industrial NT vacuum cleaners.	□
SUCTION HOSES				
Suction hoses with clip system 2.0 (compatible with vacuum cleaners from model year 2017 on)				
Suction hose	34	2.889-138.0	4 m suction hose with new bayonet and clip fastener.	■
Electrically conductive suction hose	35	2.889-137.0	4 m suction hose with new bayonet and clip fastener. Electrically conductive.	□
Suction hose	36	2.889-139.0	Suction hose with new bayonet and clip fastener. Length: 2.5 m.	□
Suction hose, oil-resistant	37	2.889-140.0	Oil-resistant suction hose with new bayonet and clip fastener. Length: 4 m.	□
Electrically conductive suction hose	38	2.889-141.0	4 m, electrically conductive suction hose with new bayonet and clip fastener.	□
	39	2.889-142.0	Suction hose, electrically conductive, with new bayonet and clip fastener. 2.5 m long.	□
Extension hose packaged NW40 2.5m	40	2.889-146.0	Extension hose for new clip system ID 40. Length: 2.5 m.	□
Repair set NW40	41	2.889-150.0	Repair kit ID 40 for the new clip system.	□
Hose connection				
Adapter, DN 32/35, with internal thread	42	6.902-077.0	Electrically non-conductive adapter with internal thread. For connecting two suction hoses without connectors. Suitable for DN 32 or DN 35.	□

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR NT 75/2 AP ME TC

1.667-292.0



		Order no.	Description	
SUCTION HOSES				
Hose connection				
Adapter, DN 40 with internal thread	43	6.900-286.0	Electrically non-conductive adapter with screw thread at both ends. For connecting 2 DN 40 suction hoses without connectors.	<input type="checkbox"/>
Suction hoses with clip system 1.0 (compatible with vacuum cleaners up to model year 2016)				
Repair set, C 40	44	2.639-873.0	Repair set (C40) includes threaded hose adapters (without bayonet adapter) for industrial NT vacuum cleaners with clip system.	<input type="checkbox"/>
Extension hose, C 40	45	6.906-344.0	2.5 m electrically non-conductive standard extension hose for all C-40 hoses with clip system.	<input type="checkbox"/>
Suction hose	46	4.440-678.0	4 m electrically non-conductive suction hose with bend, bayonet at vacuum end and C 40 clip connection at accessory end. Without module.	<input type="checkbox"/>
Suction hose (clip system), C 40, 10 m	47	6.906-279.0	10 m standard suction hose without bend and adapter. With bayonet at vacuum end and C 40 clip connection at accessory end.	<input type="checkbox"/>
Suction hose	48	6.906-321.0	4 m suction hose with bayonet and C 40 clip connection. Without bend and adapter.	<input type="checkbox"/>
	49	6.906-714.0	With bayonet and clip connection.	<input type="checkbox"/>
Suction hose complete (Clip-system), C ID 40, 4 m, el.	50	4.440-728.0	With bend and module (4.060-533.0), electrically conductive.	<input type="checkbox"/>
Suction hose (Clip-system), C 40, 16 m	51	6.906-635.0	With bayonet and clip connection.	<input type="checkbox"/>
Suction hose (clip system), C 40, 10 m, el.	52	6.906-877.0	Suction hose with bayonet coupling, electrically conductive.	<input type="checkbox"/>
Suction hoses with cone connection				
Suction hose, complete	53	4.440-263.0	Electrically non-conductive 4.0m standard suction hose with bayonett at vacuum end and DN 40 cone at accessory end.	<input type="checkbox"/>
Suction hose complete, ID 40, 4 m, oil-resistant,	54	4.440-303.0	Oil-resistant.	<input type="checkbox"/>
Suction hose, complete	55	4.440-463.0	Electrically non-conductive 10.0m standard suction hose with bayonett at vacuum end and DN 40 cone at accessory end.	<input type="checkbox"/>
Suction hose complete	56	4.440-466.0	Electrically conductive, 10.0m, ID 40	<input type="checkbox"/>

☐ Available accessories.

EQUIPMENT FOR NT 75/2 AP ME TC

1.667-292.0



		Order no.	Description	
SUCTION HOSES				
Suction hoses with cone connection				
Suction hose complete, ID 40, 10 m, oil-resistant	57	4.440-612.0	Oil-resistant.	<input type="checkbox"/>
Suction hose, complete	58	4.440-264.0	4 m standard suction hose with DN 61 bayonet at vacuum end and DN 61 cone at accessory end.	<input type="checkbox"/>
Suction hose complete, ID 61, smooth inside	59	4.440-328.0	Industrial hose, PVC/elastomer with steel spiral, smooth inside.	<input type="checkbox"/>
Suction hose, complete, DN 61, 10 m	60	4.440-467.0	10 m standard suction hose with DN 61 bayonet at vacuum end and DN 61 cone at accessory end.	<input type="checkbox"/>
Suction hose complete, ID 61, 4 m, oil-resistant	61	4.440-613.0	Oil-resistant.	<input type="checkbox"/>
Suction hose complete, ID 61, 4 m, el.	62	4.440-616.0	Electrically conductive.	<input type="checkbox"/>
FILTER BAGS				
Fleece filter bags (3 ply)				
Fleece filter bags, 5 Piece(s), NT 65, NT 70, NT 72, NT 75, NT 90	63	2.885-753.0		<input type="checkbox"/>
Paper filter bags				
Paper filter bags, 5 Piece(s), NT 48, NT 65, NT 70, NT 72, NT 75, NT 80, WET VAC	64	6.904-285.0	5 3-ply, tear-resistant paper filter bags. BIA-(U, S, G, C) dust class M. For all NT 48/1, NT 65/2 Eco + Me and NT 72/2 Eco Tc models.	<input type="checkbox"/>
FILTER T/ NT				
Flat pleated filter HEPA, dust class H				
HEPA surface filter	65	6.904-364.0	HEPA surface filter - dust class H (H 14) - with glass-fibre layers increases filter capacity when vacuuming health-endangering and carcinogenic dust.	<input type="checkbox"/>
Special filter bags, wet filter bags				
Special filter bags, wet filter bags	66	6.904-252.0	Approved for dust class L, general cleaning, wet and dry, tear-resistant.	<input type="checkbox"/>
Plastic sacks for dust-free disposal				
Plastic bag for dust-free disposal, 10 Piece(s), NT 65, NT 70, NT 72, NT 75, NT 602, NT 700, NT 702	67	6.900-698.0	PE plastic sack.	<input type="checkbox"/>
Membrane filter / fabric filter				
Candle Filter - Wood, NT 65/2, NT 75/2	68	2.414-003.0		<input type="checkbox"/>
Membrane filter, NT 65, NT 70, NT 72, NT 75, NT 551, NT 602, NT 700, NT 702, NT 802, NT 993	69	6.904-282.0	Polyester needle fleece membrane/fabric filter - BIA-C -, washable up to 40°C, metal fibres for earthing. Suitable for virtually all industrial two-motor NT vacuum cleaners.	<input type="checkbox"/>
CONNECTING SLEEVES				
Y-adapter kit				
Y-adapter kit	70	2.637-217.0	Plastic distributor - suitable for NT vacuum cleaners.	<input type="checkbox"/>

☐ Available accessories.

EQUIPMENT FOR NT 75/2 AP ME TC

1.667-292.0



		Order no.	Description	
CONNECTING SLEEVES				
Connecting sleeve C-DN (clip on taper), EL (electroconductive)				
Connection cone NW35	71	5.407-005.0		<input type="checkbox"/>
Connection cone NW40	72	5.407-006.0		<input type="checkbox"/>
C-ID 35 adapter	73	5.407-112.0	Connects C 35 hose for ID 35, electrically conductive.	<input type="checkbox"/>
C 40 adapter	74	5.407-109.0	Electrically conductive adapter (C 40) with DN 35 connection for connecting DN 35 accessories to an industrial C 40 or C-DN 40 suction hose. Suitable for NT vacuum cleaners.	<input type="checkbox"/>
C-DN 40 adapter	75	5.407-111.0	Connects C 40 hose for ID 40, electrically conductive.	<input type="checkbox"/>
Adapter for electric power tools, clip on, el.				
Sleeve for tool C35EL	76	5.453-042.0	3-way plastic adapter. For DN 26 to DN 36. For connecting power tools to an industrial C or C-DN 35 suction hose. Suitable for NT vacuum cleaners.	<input type="checkbox"/>
Adapter for electric power tools, C 35, el.	77	5.453-048.0	Inner Ø 25.4 mm, outer Ø 34.6 mm/ 38 mm, el. Only NT-vacuums.	<input type="checkbox"/>
	78	5.453-050.0	Inner Ø 27 mm, outer Ø 36.5 mm/ 38.8 mm, el. Only NT-vacuums.	<input type="checkbox"/>
Adapter for electric power tools, screwable				
Power tool adapter, threaded, DN 35	79	5.453-016.0	3-way plastic adapter with fitting instructions. For DN 26 to DN 36. For connecting to an industrial DN 35 suction hose.	<input type="checkbox"/>
Adapter for electric power tools, screwable, ID 35	80	5.453-026.0	Inner Ø 28.6 mm, outer Ø 37.3/38.8 mm.	<input type="checkbox"/>
Power tool adapter, threaded, DN 35	81	6.902-059.0	Electrically conductive power tool adapter, threaded. Internal diameter: 32 mm.External diameter: 39 mm.	<input type="checkbox"/>
	82	6.902-095.0	2-way power tool adapter, threaded. For connecting to an industrial DN 35 suction hose. Internal diameter: 28 mm.External diameter: 34 mm and 38.8 mmSuitable for NT vacuum cleaners.	<input type="checkbox"/>
Reducing sleeves				
Reducer	83	5.407-108.0	Threaded reducer - from C-40 to DN 35. Suitable for NT vacuum cleaners.	<input type="checkbox"/>
	84	6.902-017.0	Reducer for accessory extension. Ideal for accessories with DN 35 connecting cone in combination with accessories with DN 40 connecting cone.	<input type="checkbox"/>

☐ Available accessories.

EQUIPMENT FOR NT 75/2 AP ME TC

1.667-292.0



		Order no.	Description	
CONNECTING SLEEVES				
Reducing sleeves				
Sleeve C40 / C35	85	5.407-113.0	Reducer (C 40 to C 35) for connecting accessories with C-35 clip connection to suction hoses with C 40 clip system.	<input type="checkbox"/>
Reducer from ID 35 to 32	86	6.902-072.0	Reducer with internal connecting cone DN 32. Ideal for accessories from the industrial vacuum cleaner range in combination with industrial NT vacuum cleaners.	<input type="checkbox"/>
Set reducing / extension sleeves				
Set reducing / extension sleeves	87	2.860-117.0	ID 40/35, ID 35/32 (tube -> nozzle), plastic.	<input type="checkbox"/>
TARGET GROUP SPECIFIC VACUUM CLEANER ACCESSORY SETS				
Professional cleaning kit ID 40	88	2.637-353.0	Individual parts: Suction hose 4 m (4.440-263.0), bend, metal (6.900-276.0), suction tube 2 × 0.5 m, metal (6.900-275.0), grout nozzle (6.903-033.0), floor nozzle with rollers (6.903-051.0).	<input type="checkbox"/>
Car cleaning kit	89	2.862-166.0	Contains: - Car cleaning nozzle ID 35 - Upholstery/crevice tool ID 35 - Suction brush ID 35 - Connecting sleeve C 35/ ID 35	<input type="checkbox"/>
Chip cleaning kit	90	2.640-760.0	Individual parts: suction hose 4 m, oil-proof (4.440-613.0), crevice tool (6.900-222.0), rubber suction nozzle angled at 45° (6.902-106.0).	<input type="checkbox"/>
OTHER ACCESSORIES FOR T AND NT				
CS 40 Me	91	2.863-026.0	The highly efficient CS 40 Me cyclone preseparator for all Kärcher wet and dry vacuum cleaners is a specially designed accessory for fine dust applications on construction sites or in industry.	<input type="checkbox"/>
Adapter connection old elektr. leitend	92	5.031-436.0		<input type="checkbox"/>
UBS NON-CONDUCTIVE MEDIA				
Add-on kit nonconducting media NT Tact ²	93	2.642-602.0	For switching off when vacuuming non-conductive fluids such as oils and greases	<input type="checkbox"/>

☐ Available accessories.